



**AFIKIM ELECTRIC VEHICLES**

מס' ת.ד. 5148, תל אביב  
טל: 03-6754814  
טל: 03-6754450  
www.afikimelectricvehicles.com  
af@aficevents.com



10/02/09

To whom it concern :

We hereby certify that ,

"The battery in the "GOGO " scooter by Pride company'  
are Sealed lead acid batteries type .

See attached full declaration of Pride.

Afikim Eelectric mobilizers

Marketing Department.

רכב חשמלי אפיקים  
אגש"ח בע"מ  
מחלקת שיווק



**UPG**  
Let us power you.™

1728 HAYDEN DRIVE  
CARROLLTON, TX 75006  
www.upgi.com

P 469.892.1122  
T 866.892.1122  
F 469.892.1133

AUTOMOTIVE    INDUSTRIAL    MARINE    MEDICAL    SECURITY    TELECOM    UPS


### MATERIAL SAFETY DATA SHEET

Material Safety Data Sheets (MSDS) are a sub requirement of the Occupational Safety and Health Administration (OSHA) Hazard Communication Standard 29 CFR Subpart 1910.1200. This Hazard Communication Standard does not apply to the various subcategories including anything defined by OSHA as an "article" as an manufacturing item other than a fluid or particle; 1.) Which is formed to a specific shape or design during manufacture 2.) Which has end functions(s) dependent in the whole or in part upon its shape or design during end use 3.) Which under normal conditions of use does not more than very small quantities, e.g. minute or trace amounts of a hazardous chemical, and does not pose a physical hazard or health risk to employees.

Because all of our batteries are defined as "articles", they are exempt from the requirements of Hazard Communication Standard, 29 CFR 1910.1200; hence a MSDS is not required.

The following components are found in a Universal Battery sealed lead acid battery:

		Weight Range:
Sulfuric Acid-Electrolyte	H <sub>2</sub> SO <sub>4</sub>	10-20%
Lead-Negative Electrode	Pb	30-60%
Lead Dioxide-Positive Electrode	PbO <sub>2</sub>	5-25%
Lead Sulfate- Positive Electrode	PbSO <sub>4</sub>	1-25%



Concentration of components depends on the state of charge and discharge and the battery size. The hazardous waste code for the lead acid batteries is D008. At the end of its useful life, please recycle this battery.



**UPG**

Let us power you.™

1720 HAYDEN DRIVE  
CARROLLTON, TX 75608  
www.upg.com

P 469.892.1122  
T 866.892.1122  
F 469.892.1123

AUTOMOTIVE INDUSTRIAL MARINE MEDICAL SECURITY OEM SECURITY TELECOM UPS

**MATERIAL SAFETY DATA SHEET**


Material Safety Data Sheets (MSDS) are a sub requirement of the Occupational Safety and Health Administration (OSHA) Hazard Communication Standard 29 CFR Subpart 1910.1200. This Hazard Communication Standard does not apply to the various subcategories including anything defined by OSHA as an "article" as a manufacturing item other than a fluid or particle: 1.) Which is formed to a specific shape or design during manufacture 2.) Which has end functions(s) dependent in the whole or in part upon its shape or design during end use 3.) Which under normal conditions of use does not more than very small quantities, e.g. minute or trace amounts of a hazardous chemical, and does not pose a physical hazard or health risk to employees.

Because all of our batteries are defined as "articles", they are exempt from the requirements of Hazard Communication Standard, 29 CFR 1910.1200; hence a MSDS is not required.

The following components are found in a Universal Battery sealed lead acid battery:

Sulfuric Acid-Electrolyte	H <sub>2</sub> SO <sub>4</sub>	Weight Range:
Lead-Negative Electrode	Pb	10-20%
Lead Dioxide-Positive Electrode	PbO <sub>2</sub>	30-60%
Lead Sulfate- Positive Electrode	PbSO <sub>4</sub>	5-25%
		1-25%

The overall reaction is:




Concentration of components depends on the state of charge and discharge and the battery size. The hazardous waste code for the lead acid batteries is D003. At the end of its useful life, please recycle this battery.

## יתרונות




◀ מערכת משככי זעזועים (CTS) לנסיעה רכה




◀ ניתן להתקין מצבר גדול להשגת טווח נסיעה מוגבר



◀ כפות הידיים מוגנות באמצעות הכידון אפשרות נהיגה באמצעות האגודלים בלבד

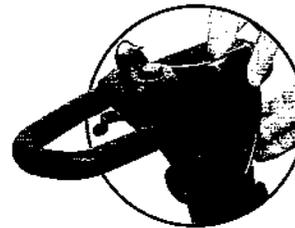

◀ שני סטים של פאנלים להחלפה מהירה של צבעים (אדום וכחול)

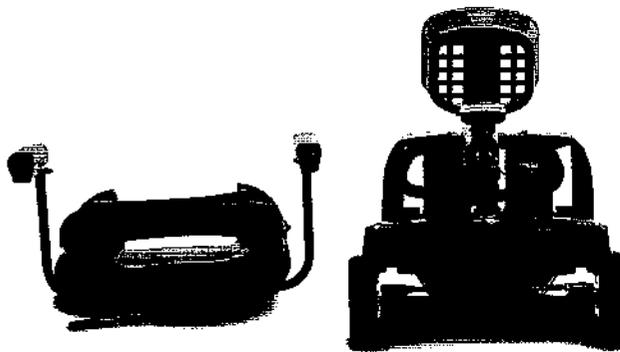

◀ "קיפול בנגיעה" - קל ומהיר ביד אחת פירוק קל ומהיר לחמישה חלקים קלי משקל

Go-Go LX		מפרט טכני
4 גלגלים	3 גלגלים	
104 ס"מ	101 ס"מ	אורך
52.1 ס"מ	52.1 ס"מ	רוחב
90 ס"מ	90 ס"מ	גובה
3.8 ס"מ		מרווח גחון
53.4 ק"ג	52.5 ק"ג	משקל כולל מצברים
39.6 ק"ג	38.7 ק"ג	משקל ללא מצברים
16.6 ק"ג	15.4 ק"ג	משקל החלק הכבד ביותר
16.9 ק"מ	15.2 ק"מ	טווח נסיעה במישור
136 ק"ג		עומס מירבי
6.4 קמ"ש	7 קמ"ש	מהירות מירבית
14.1%		זווית טיפוס מירבית
116.2 ס"מ	85 ס"מ	רדיוס סיבוב
46 ס"מ		רוחב מושב
גומי מלא		סוג גלגלים
7"X2X7"	8"X2.5"	מידות גלגלים קדמי
8"X2.5"		מידות גלגלים אחורי
12V / 12A/h זוג		סוג מצברים
24V DC		יחידת הנעה אחורית
אדום / כחול		צבע

נבדק על ידי היצרן על פי פרמטרים בסנעל.